



# P&Z ELECTRONICS CO.,LTD


MiZn Common Mode Power Line Choke

Web:<http://www.dgpinzhan.com>

E-mail:[sale@dgpinzhan.com](mailto:sale@dgpinzhan.com)

Part Code	Date	Production	Type	Version	Page
PZTBL1264V-202M	2018/9/5	Tom	DIP	A001	1

## 1. Dimensions: [mm]

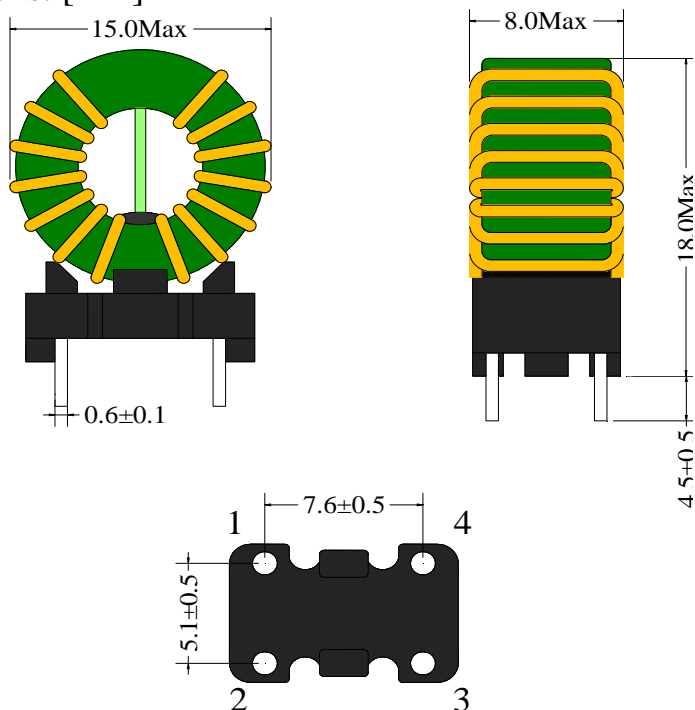

## 4. General Properties:

It is recommended that the temperature of the component does not exceed +125°C under worst case conditions.

Storage Temperature: -20 °C up to +60 °C

Operating Temperature: -40 °C up to +125 °C


Temperature Rise < 55K.

Test conditions of Electrical Properties: +20°C, 33% RH if not specified differently.

## 5. Electrical Properties:

Properties	Test conditions	Value	Unit	Tolerance
Inductance	10KHZ/0.25V	2	mH	Min
DC Resistance	@20 °C	65	mΩ	Max
Rated Current	@70 °C	2	A	Max
Rated Voltage(UR)	50 Hz	250	V/(AC)	Max
Insulation Test Voltage(UT)	50 Hz/ 5 mA/ 3 sec.	1500	V/(AC)	Pass

## 2. Schematic:



## 3. PCB Layout Ref(mm)

